

AC Three Phase General Series

产品特点 Features

- ◇ 多级滤波电路, 优越的共模干扰抑制性能;
Multi-stage filter circuit , excellent CM attenuation performance;
- ◇ 匹配国内外多种低电压变频器和伺服驱动器。
Matching multiple low-voltage inverters and servo drivers.

应用范围 Applications

- ◇ 适用于三相变频器和伺服驱动器电机调速控制系统。
Three phase inverters and motor speed control system of servo drivers.

技术参数 Specifications

RoHS

型号 Model	端接方式 Terminals		额定电流 Rated Current	变频器功率 Power (KW)	额定电压 Rated Voltage	工作 频率 Frequency	测试电压 Test Voltage	最大漏电流 Leakage Current @ 250VAC/50Hz	气候类别 Climate	外形尺寸 Dimensions
CX1-K2LB-3A			3A	1.0	380/440 VAC	50/400Hz	线—线 L-N 1500VDC/1min 线—地 L-G 1500VAC/1min	≤5mA	25/085/21	Fig1
CX1-K2MB-6A			6A	1.5/3						Fig2
CX1-K2UT-10A			10A	5						Fig3
CX1-K2UT-15A			15A	7.5						Fig3
CX1-K2UT-20A			20A	10						Fig3
CX1-K2UT-30A			30A	15						Fig3
CX1-K2NB-50A			50A	22				≤20mA		Fig4
CX1-K2TB-100A			100A	45				≤30mA		Fig5
CX1-K2TB-150A			150A	75						Fig5

外形尺寸 Dimensions

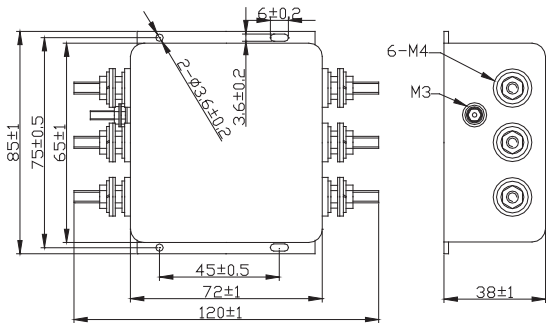


Fig1

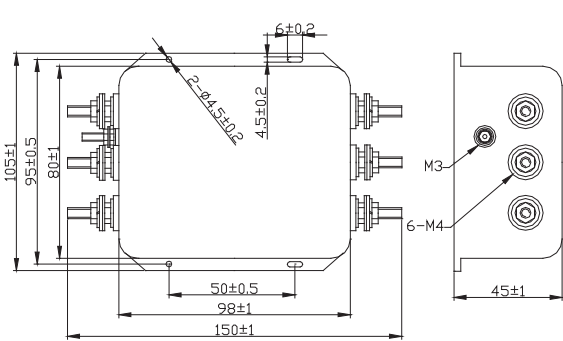


Fig2



交流三相普通型

AC Three Phase General Series

外形尺寸 Dimensions

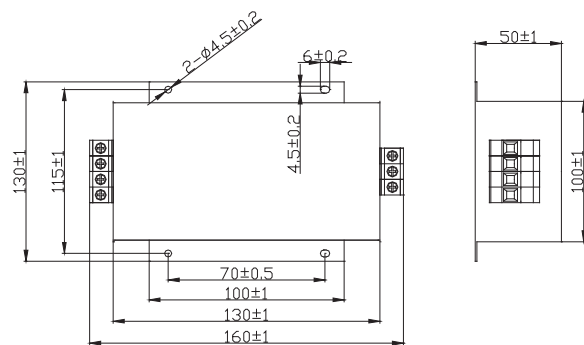


Fig3

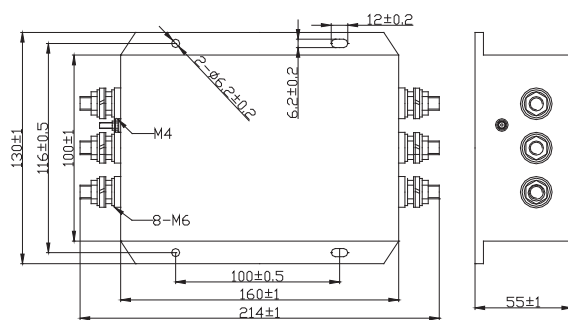


Fig4

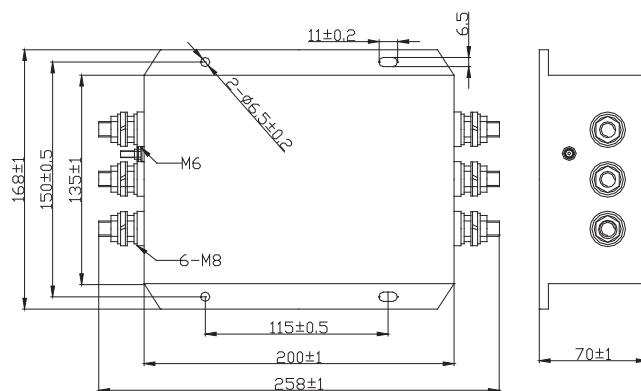


Fig5