



## 产品特点

- ◇ 镍锌铁氧体材质，使用频段范围宽，阻抗特性好；
- ◇ 卡式结构，可以方便地应用于电源线缆、数据线缆，抑制电磁噪声辐射；
- ◇ 各种尺寸、阻抗特性可供选择。

## 技术参数

型号	尺寸 (mm)					线缆直径 (mm)	阻抗 ( $\Omega$ min)			FIG
	A	B	C	D	E		10 MHz	25 MHz	100 MHz	
<b>BNF1130</b>	20.5	11	36	32		10.0	20	60	110	1
<b>BNF1330</b>	30	13	39	34		12.0	60	80	130	2
<b>BNF1525</b>	13.3	5.0	25	11.5		4.5	40	55	100	3
<b>BNF1528</b>	19	8	35	14.5	5	7.0	60	90	180	4
<b>BNF1730</b>	16.5	7	30	15		6.0	30	50	110	3
<b>BNF12</b>	15.5	7	22	18		6.0	20	25	50	5
<b>BNF14</b>	18.8	7	31			6.5	70	120	220	6
<b>BNF18</b>	23.7	10	31			9.0	50	80	150	6
<b>BNF27</b>	33	14	31.5			12.5	60	130	200	6
<b>BNF0930</b>	19.5	9	35	17.5		9.0	50	80	140	3
<b>BNF12H</b>	14.7	7.5	22	18		6.0	25	45	65	7
<b>BNF1010</b>	24.5	10	19.5	13.5	28.5	9.5	15	35	75	8
<b>BNF1512</b>	29	15	21.5	15	34.5	14.0	18	30	70	8
<b>BNF0822</b>	20	8	22			7.2	30	48	110	9
<b>BNF0917</b>	19	9	21	17	20	9.0	20	35	80	10
<b>BNF0917B</b>	29	9	21	17	20	9.0	20	35	80	13
<b>BNF0930A</b>	19.6	9	18	35.7		9.0	50	80	140	11
<b>BNF2915</b>	29.5	33.5	18	22	2±0.4	2	10	25	80	12

## 外形尺寸




Fig 1




Fig 2

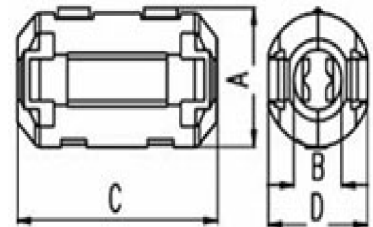
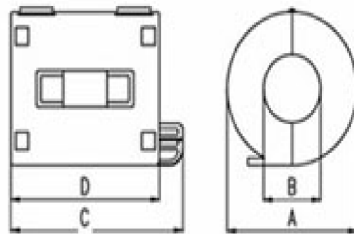


Fig 3

## 外形尺寸

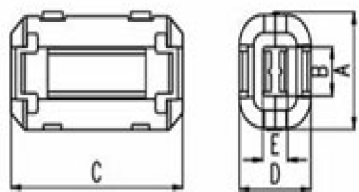


Fig 4

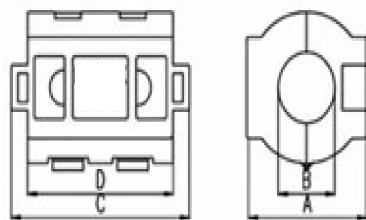


Fig 5

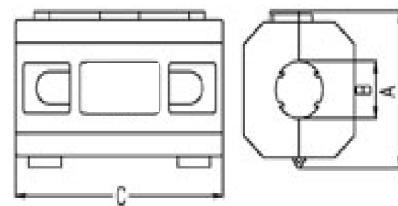


Fig 6

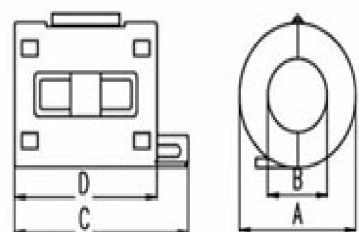


Fig 7




Fig 8




Fig 9

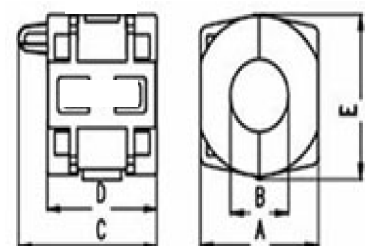


Fig 10

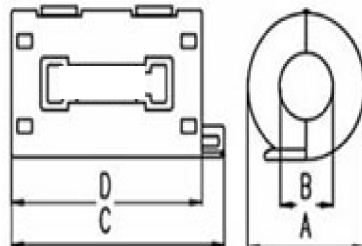


Fig 11

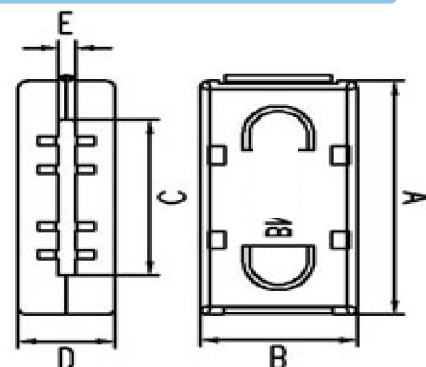


Fig 12




Fig 13